Step 1 3 Inch RTT Riser Install Instructions






Step by step on how to install the Victory 4x4 Roof Top Tent 3 Inch Risers. The risers lift your roof top tent 3 inches off your bed rack for extra clearance. They fit any Victory 4x4 bed rack, or any bed rack that uses 10 series aluminum crossbars. Sold as a set of 4. Please read all steps carefully before starting the install. The photos in steps 3 to 6 show our standard RTT mounts; the 3 inch risers install the same way.

Questions or Support:
Phone: 269-353-1184
Email: info@victory4x4.com

Step 2 Included Parts & Hardware



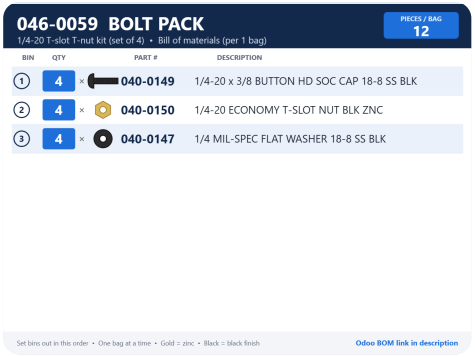

Check that you have all of the parts and hardware shown before starting. Hardware: four 046-0059 bolt packs, one per riser. Each pack has four 1/4-20 x 3/8" button head bolts, four 1/4-20 T-slot nuts and four 1/4" flat washers (see the bill of materials picture).

Step 3 Slide the T-Nuts Into the Crossbar



Slide four 1/4-20 T-slot nuts into the T-slot channel of the crossbar for each riser (16 total). Leave them loose so you can slide them into position later.

Step 4 Mount the Risers to the Crossbars





Set a riser on the crossbar with its bottom flanges over the T-nuts. Put a 1/4" flat washer on each 1/4-20 x 3/8" button head bolt, thread them through the flanges into the T-nuts and snug them with a 5/32" hex. Repeat for all 4 risers.

Step 5 Space the Risers for Your Tent



Measure the mounting channels on the bottom of your tent. Slide the risers along the crossbars so all 4 line up with the channels, then fully tighten the bolts with a 5/32" hex.


Step 6 Mount the Roof Top Tent





Set the tent on the rack with its mounting channels over the risers. Using the hardware supplied with your tent, bolt through the slots on top of each riser into the tent channels. Tighten all 4 risers.

Step 7 Final Check

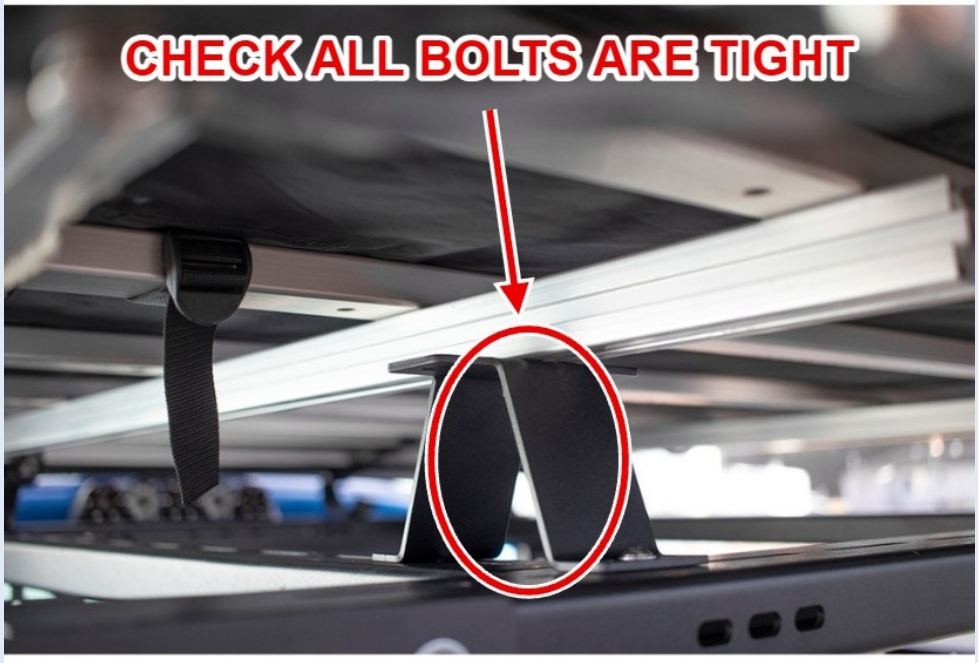

Make sure every bolt is tight. Your tent now sits 3 inches higher on the rack for extra clearance.