




## Install Doc - Universal Locking Tool Mount

Feedback?




1

1x

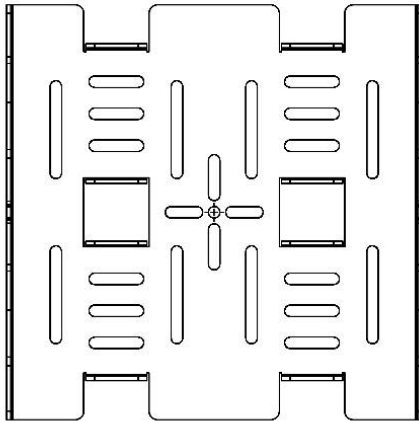

2x

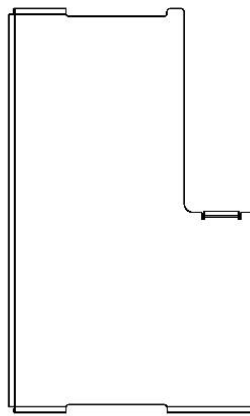

Included Parts: (1x) Tool Mount Base Plate | (2x) Tool Mount Door

2



Included Hardware: (8x) 5/16"-18 x 3/4" Button Head Bolt | (8x) 1/4 USS Washer | (4x) 5/16" Nylon Washer | (4x) 5/16"-18 Nylon Inset Locknut | (4x) 5/16"-18 Serr. Flange Nut | (2x) (4x) 5/16"-18 Knob | (1x) Foam Square | (1x) Strip of U-Channel Edge Trim




## Install Doc - Universal Locking Tool Mount

Feedback?




3

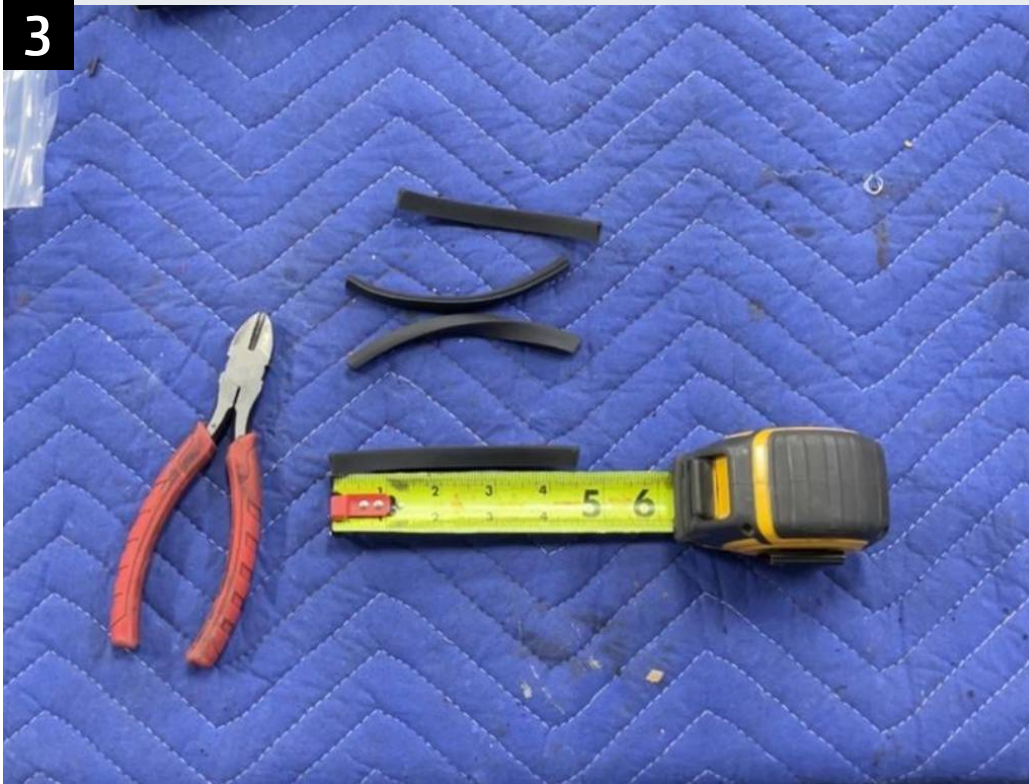

Cut the edge trim into four roughly 4.5" strips.

4

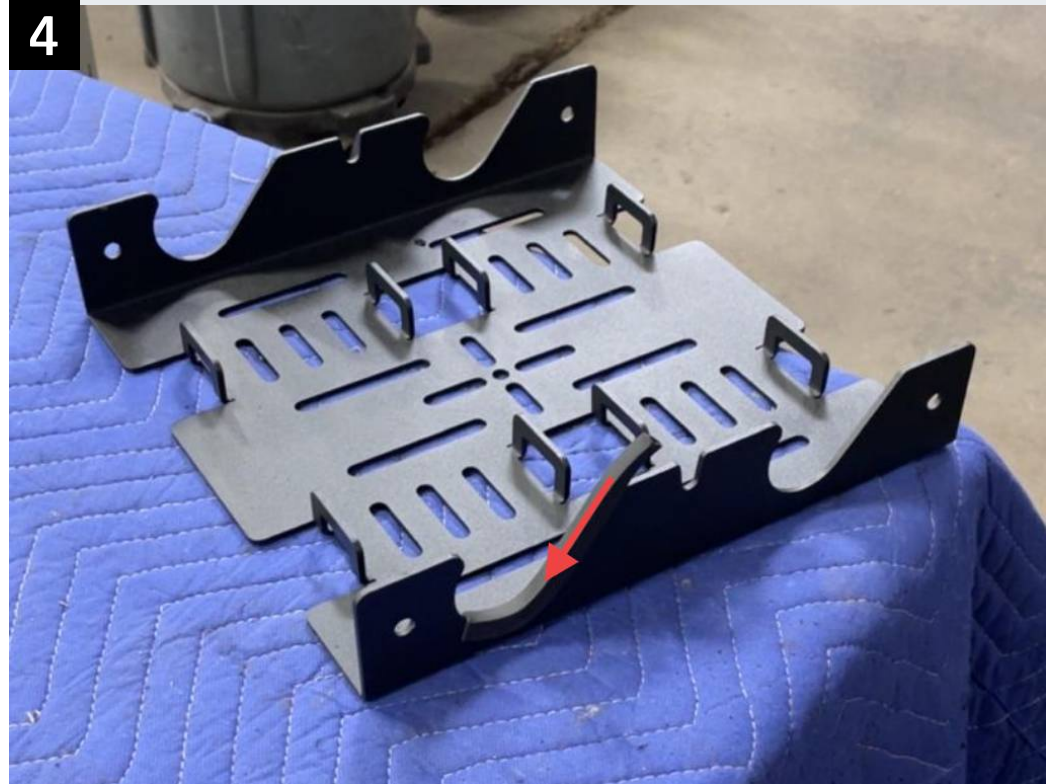

Slide the edge trim onto each of the four cutouts in the mounting plate. It is easiest to start on the longer edge and push the trim around the radius following the arrow shown in the image.




## Install Doc - Universal Locking Tool Mount

Feedback?



5  
Cut the foam as desired for your specific application. This will help to hold the tools in place without any movement. Simply cutting the square in half is a safe bet for many applications.

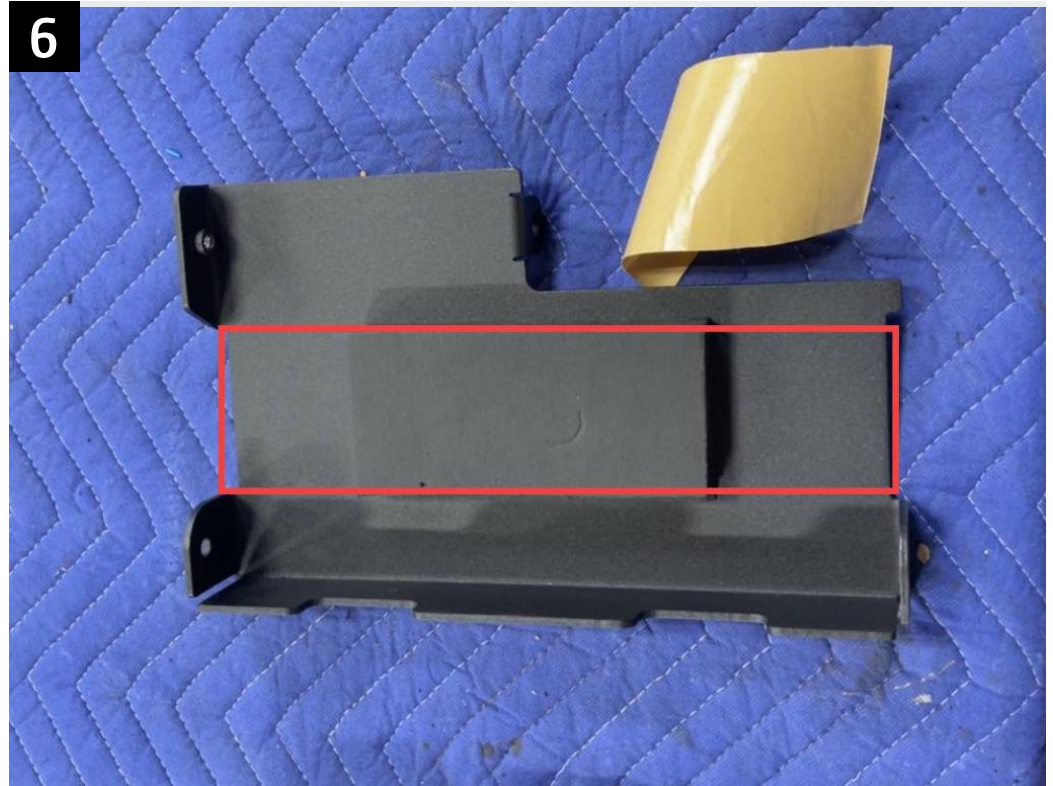

6  
Peel the backer off the foam and stick it to the inside surface of the door in the desired position. This will most likely be in the position shown in the image. Keep in mind that the tool will sit in the red boxed area.



## Install Doc - Universal Locking Tool Mount

Feedback?



7



To mount the door, insert a 5/16" button head through the 1/4" USS washer, mounting plate, nylon washer and door in that order with one of the 5/16"-18 nylon insert locknuts on the other end as shown in the image. Repeat this for the other four mounting holes. It can be helpful to use something thin and flat such as flat head screw driver to help position the nylon washers.

8



Once all bolts are loosely in place, tighten them until the doors are able to stay open on their own, but not so much that they are difficult to open and close. Adjust as needed.




## Install Doc - Universal Locking Tool Mount

Feedback?



9

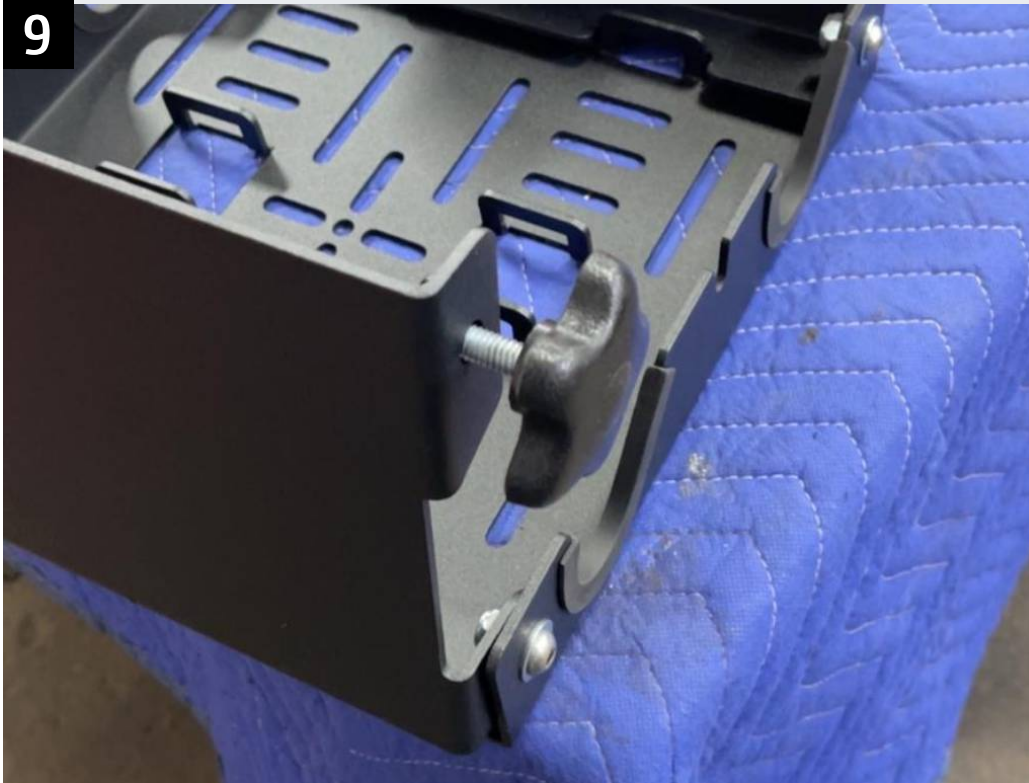

Thread the knobs part way into the nuts in the doors. The knobs are used to secure the doors to the base plate in the closed and ensure they do not open unintentionally.

10



The remaining bolts are provided for mounting. Depending on what you are mounting to, different slots may need to be used and different hardware may need to be sourced. The bent tabs on the mounting face can be used for straps, bungee cords, or other similar thing as needed.



## Install Doc - Universal Locking Tool Mount

Feedback?



11

**Thank you for supporting  
American-made. We hope you  
enjoy your new product!**

If you have any questions or concerns  
please reach out to us.

info@jcroffroad.com  
info@victory4x4.com  
info@squatch-proof.com  
info@fatamericanmfg.com

269-353-1184



**SQUATCH  
PROOF**

**FAT  
AMERICAN MFG.**