## Step 1 200 Series Monitor Delete Install Instructions





Step by step on how to install the 200 Series Monitor Delete. Please read all steps carefully before starting the install.

Installation Video: https://www.youtube.com/watch?v=-Po9fLDUaag

Questions or Support:
Phone: 269-353-1184
Email: info@victory4x4.com

## Step 2 Included Parts



Check that you have all of the parts shown before starting.

## Step 3 Included Hardware

**046-0125 BOLT PACK**

VLCMD-BP • Bill of materials (per 1 bag)

PIECES / BAG 8


| BIN | QTY | PART # | DESCRIPTION |
|---|---|---|---|
| 1 | 4 × | 040-0148 | 1/4-20 x 3/4 BUTTON HD SOC CAP 18-8 SS BLK |
| 2 | 4 × | 040-0147 | 1/4 MIL-SPEC FLAT WASHER 18-8 SS BLK |

Set bins out in this order • One bag at a time • Gold = zinc • Black = black finish

Odoo BOM link in description

Check that you have all of the hardware shown before starting.

## Step 4 Remove Cover Panel

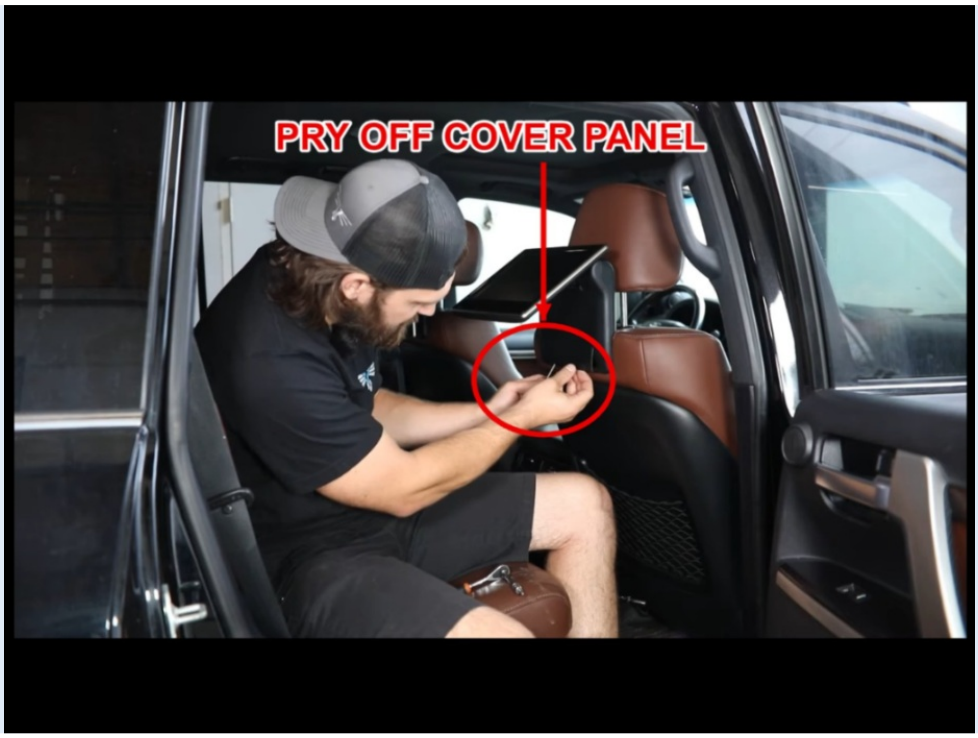



200 Series and LX570 monitor delete panel. Start by removing the plastic cover panel behind the monitor. Use a plastic pry tool or flat head screwdriver to pop the small bottom piece off.

## Step 5 Disconnect Harnesses




With the cover off, disconnect the 2 exposed wire harnesses. Both are thumb tabs you pinch to release.

## Step 6 Remove Monitor

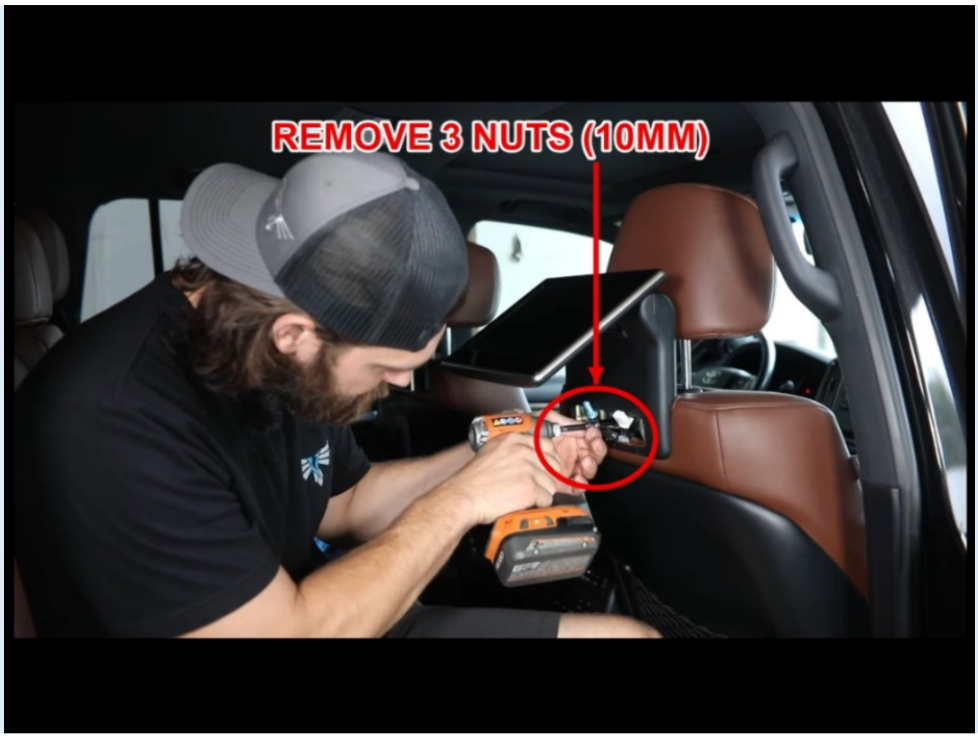


Use a 10 mm socket to remove the 3 factory nuts holding the monitor. Support the monitor as you remove the last nut, because it wants to fall. Then pull it straight back.


## Step 7 Install Mounting Bracket




Slide the mounting bracket onto the 3 studs with the flange pointing up and the bracket behind the wiring. Tighten the 3 factory nuts with the 10 mm socket and reinstall the factory ground on the middle stud. Keep the 2 connectors clear, one on each side of the middle flange.


## Step 8 Install Face Bracket

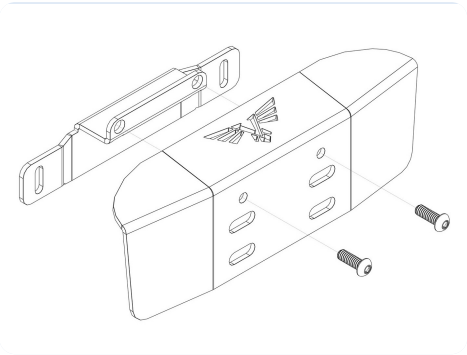


Secure the face bracket to the mounting bracket with the provided button head bolts in the orientation shown. Repeat the same process on the opposite side.

## Step 9 Final Check

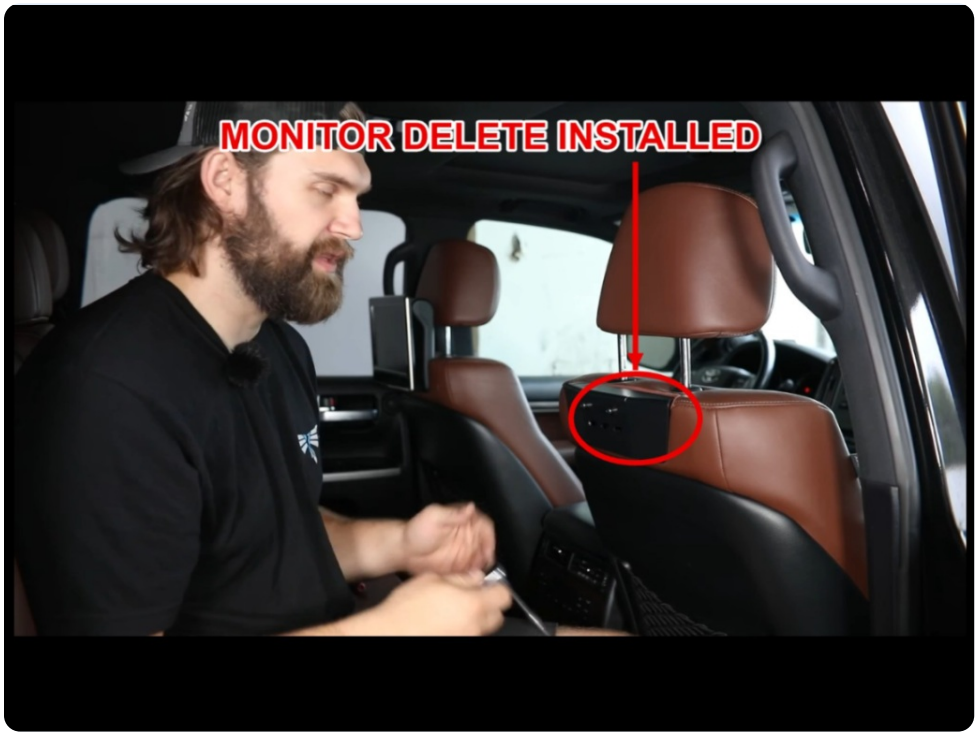

Your monitor delete panel is installed.
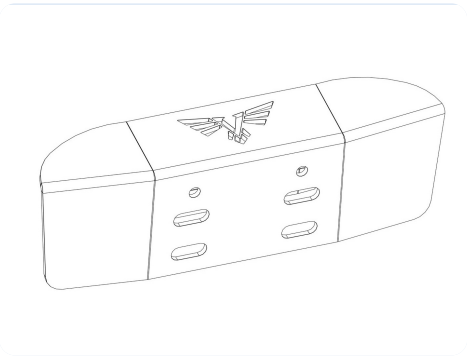
## Step 10 Installation Complete



Confirm all hardware is tightened. Congrats! Your installation of the 200 Series Monitor Delete is now complete. Enjoy!